



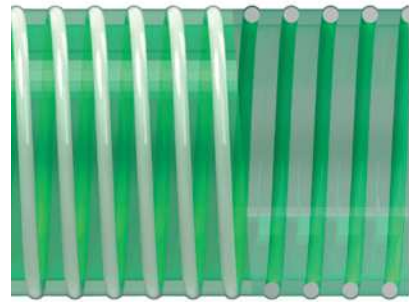

HOSE WORLD

LIGHT DUTY SUPERFLEXIBLE PVC S & D HOSE



APPLICATION: SUCTION AND DELIVERY OF WATER AND LIGHT SLURRY.

TECHNICAL SPECIFICATION

TUBE: SMOOTH TRANSLUCENT GREEN FLEXIBLE PVC

COVER: LIGHTLY CORRUGATED TRANSLUCENT GREEN SUPERFLEXIBLE PVC

REINFORCEMENT: WHITE SHOCK PROOF PVC SPIRAL HELIX

TEMPERATURE RANGE: -15°C + 65°C

I.D		O.D	W.P		VACUUM	BEND RADIUS	WEIGHT	MAX COIL	CODE
MM	INS	MM	PSI	BAR	mH ₂ O	MM	KG/M	M	
19	3/4	24	45	3.0	7	86	0.19	30	LWP-019
25.4	1	31	40	2.8	7	114	0.27	30	LWP-025
32	1 1/4	38	35	2.7	7	143	0.35	30	LWP-032
38	1 1/2	45	32	2.3	7	171	0.46	30	LWP-038
51	2	58	30	2.0	7	230	0.74	30	LWP-051
63.5	2 1/2	72	30	2.0	7	254	1.04	30	LWP-063
76	3	86	30	2.0	7	304	1.36	30	LWP-076

ALL VALUES MEASURED AT 20°C