




COMPOSITE CHEMICAL DELIVERY HOSE ASSEMBLY

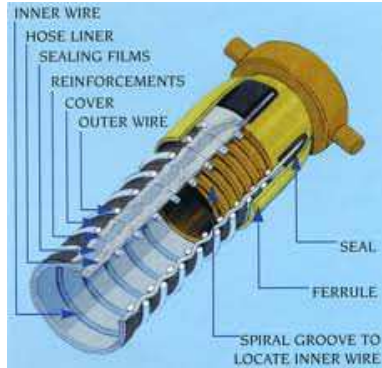

APPLICATION: TANKER CHEMICAL DELIVERY HOSE

TECHNICAL SPECIFICATION

INNER LINING: PTFE

COVER: PVC COATED POLYESTER CLOTH

REINFORCEMENT: INTERNAL STAINLESS STEEL WIRE; EXTERNAL GALVANISED STEEL WIRE

TEMPERATURE RANGE: -30⁰C + 80⁰C

W.P. SAFETY FACTOR: 4:1

CONFORMS TO: BS EN 13765

FITTED WITH SWAGED COUPLINGS ACCORDING TO REQUIREMENT

SUPPLIED WITH TEST CERTIFICATE

BUILT TO LENGTH REQUIRED

ALTERNATIVE LININGS AND REINFORCEMENTS AVAILABLE TO MEET SPECIFIC CHEMICAL RESISTANCE REQUIREMENTS

ELECTRICALLY CONTINUOUS

I.D		O.D	W.P		BEND RADIUS	WEIGHT	MAX.LENGTH	CODE
MM	INS	MM	PSI	BAR	MM	KG/M	M	
25	1	37	200	14	100	1.1	20	CCH:025
32	1 1/4	44	200	14	140	1.3	20	CCH:032
38	1 1/2	52	200	14	150	1.35	20	CCH:038
2	51	62	200	14	180	1.41	20	CCH:051
2 1/2	63	77	200	14	205	1.70	20	CCH:063
3	76	90	200	14	280	2.20	20	CCH:076
3 1/2	90	106	200	14	340	2.30	20	CCH:090
4	102	122	200	14	395	2.40	20	CCH::102