




HOSE WORLD

HIGH PRESSURE GROUTING HOSE

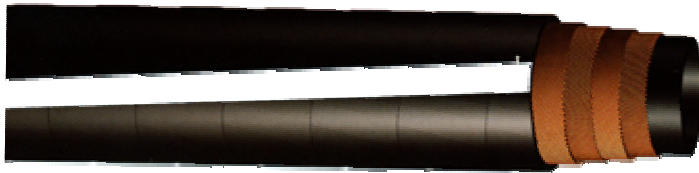

APPLICATION: TRANSPORT OF ABRASIVE MATERIALS IN HIGH PRESSURE GROUTING, PLASTER SPRAYING AND MORTAR INJECTION APPLICATIONS.

TECHNICAL SPECIFICATION

TUBE: SMOOTH BLACK ELECTRICALLY CONDUCTIVE ABRASION RESISTANT NR RUBBER
ABRASION RESISTANCE TO DIN 53516 70mm³

COVER: WRAPPED BLACK ELECTRICALLY CONDUCTIVE NR/SBR RUBBER

REINFORCEMENT: MULTIPLE TEXTILE PLYS WITH ANTISTATIC COPPER WIRE

TEMPERATURE RANGE: -25°C + 80°C

SAFETY FACTOR: 3 x W.P.

BRANDING: BLACK INK ON WHITE STRIPE "PLASTER / GROUTING HOSE 40 BAR W.P"

I.D		O.D	W.P		BEND RADIUS	WEIGHT	MAX COIL	CODE
MM	INS	MM	PSI	BAR	MM	KG/M	M	
19	3/4	31	600	40	95	0.74	40	HPG-19
25	1	38	600	40	125	1.01	40	HPG-25
32	1 1/4	46	600	40	160	1.30	40	HPG-32
35	1 3/8	51	600	40	175	1.60	40	HPG-35
38	1 1/2	54	600	40	190	1.88	40	HPG-38
50	2	68	600	40	250	2.43	40	HPG-51