




**HOSE WORLD**

## MEDIUM DUTY PVC DUCTING WITH WIRE SPIRAL

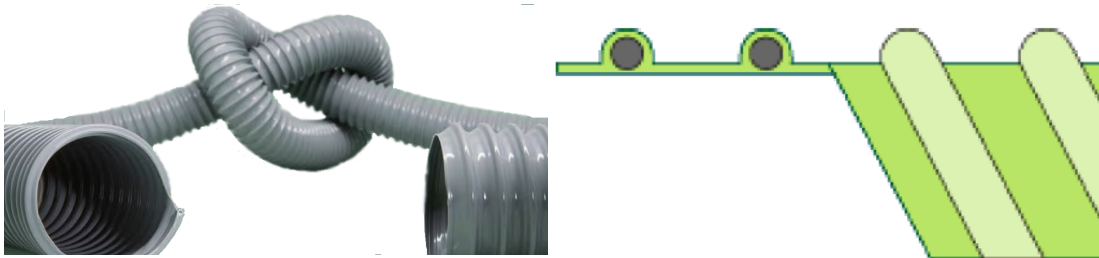

**APPLICATION:** UNIVERSAL DUCTING  
USED FOR CONVEYING VARIOUS FUMES,  
LIQUIDS , GASES, FIBRES, DUST

### TECHNICAL SPECIFICATION

**COVER:** MEDIUM WEIGHT GREY PVC

**REINFORCEMENT:** WIRE HELIX

**TEMPERATURE RANGE:** 0°C + 60°C

I.D. MM	WALL THICKNESS MM	THICKNESS SPIRAL (MM)	WEIGHT GR/MT	BENDING RADIUS (MM)	VACUUM M/H <sup>2</sup> O	LENGTH MTR	CODE
13	0.80	1.30	70	13	8	10	VFG-013
16	0.80	1.30	90	16	6	10	VFG-016
19	0.80	1.30	110	20	5.5	10	VFG-019
25	0.80	1.30	170	25	4.5	10	VFG-025
32	0.80	1.30	250	30	4	10	VFG-032
38	0.80	1.30	300	40	4	10	VFG-038
40	0.80	1.30	300	40	4	10	VFG-040
45	0.80	1.30	320	45	4	10	VFG-045
50	0.80	1.30	380	50	3	10	VFG-050
55	0.80	1.30	400	55	3	10	VFG-055
60	0.80	1.30	450	60	3	10	VFG-060
63	0.80	1.30	500	65	3	10	VFG-063
70	0.80	1.30	520	70	3	10	VFG-070
75	0.80	1.30	630	75	2	10	VFG-075
80	0.80	1.30	650	80	2	10	VFG-080
90	0.80	1.30	700	90	2	10	VFG-090
100	0.80	1.60	740	100	2	10	VFG-100
110	0.80	1.60	790	110	2	10	VFG-110
120	0.80	1.60	850	120	2	10	VFG-120
127	0.80	1.60	880	125	2	10	VFG-125
130	0.80	1.60	890	130	1	10	VFG-130
140	0.80	1.60	910	140	1	10	VFG-140
152	0.80	1.60	950	150	1	10	VFG-152
160	1.00	1.60	1000	160	1	10	VFG-160
180	1.00	1.60	1300	180	1	10	VFG-180
203	1.00	2.20	2050	200	1	10	VFG-203
250	1.00	2.20	2850	250	1	10	VFG-250
305	1.00	2.20	3650	300	1	10	VFG-305