




HOSE WORLD LTD
UNIT 3
ACREDALE INDUSTRIAL ESTATE
EYEMOUTH
TD14 1LQ

TEL: 01890 752555
FAX: 01890 751789
Email: info@hoseworld.com

DATA SHEET: EN 857 2 WIRE COMPACT HOSE

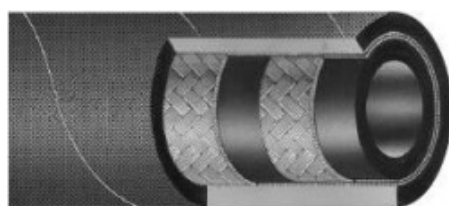

Registered Company

APPLICATIONS

HYDRAULIC OIL PRESSURE LINE
 SUITABLE FOR MINERAL & BIOLOGICAL FLUIDS
 POLYGLYCOL BASE OILS, WATER-OIL EMULSIONS & WATER

TECHNICAL SPECIFICATION

TUBE: SMOOTH BLACK SYNTHETIC RUBBER
COVER: WRAPPED BLACK MSHA FLAME RETARDANT RUBBER
REINFORCEMENT: 2 HIGH TENSILE STEEL WIRE BRAIDS
CONFORMS TO: EN 857 2SC & SAE 100R16 ISO11237 2SC
TEMPERATURE RANGE: -40°C to + 100°C (intermittent to 125°C)
BRANDING: BLUE INK EN857 2SC DN... W.P.

I.D.			O.D.	W.P.		MIN. BEND RADIUS	WEIGHT	CODE
mm	ins	DASH	mm	psi	Bar	mm	Kg/mtr	
6	¼	04	13.8	5800	400	65	0.28	EN857 2SC-04
10	3/8	06	17.3	4800	330	70	0.42	EN857 2SC-06
12	½	08	20.8	4000	275	90	0.52	EN857 2SC-08
19	¾	12	28.6	3100	215	120	0.79	EN857 2SC-12
25	1	16	36.6	2400	165	150	1.10	EN857 2SC-16